


RAPIDO FG

RAPIDO FG HIGH SPEED VERSATILE FOLDER GLUER

High speed non stop production, fast setup, ergonomic design and easy accessibility reduce setup time. Can be equipped with a speedwave for fast crash lock, 4 and 6 corners.

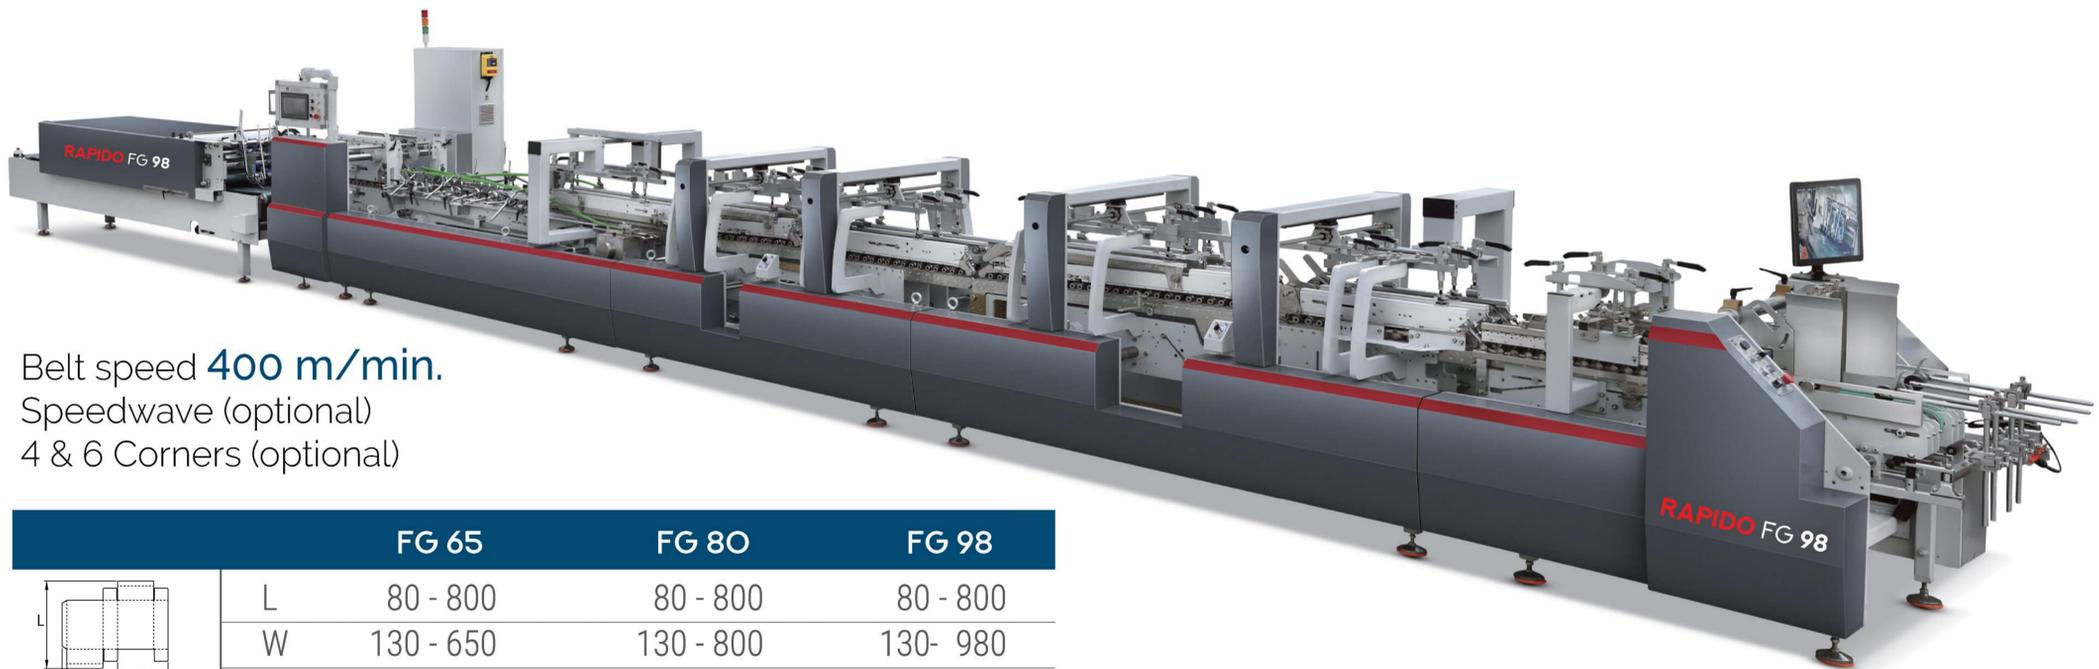

Belt speed **400 m/min.**
Speedwave (optional)
4 & 6 Corners (optional)

	FG 65	FG 80	FG 98	
	L	80 - 800	80 - 800	80 - 800
	W	130 - 650	130 - 800	130 - 980
	H	60 - 315	60 - 390	60 - 480
	L	90 - 800	90 - 800	90 - 800
	W	170 - 650	170 - 800	170 - 980
	H	80 - 315	80 - 390	80 - 480
	L	130 - 800	130 - 800	130 - 800
	W	150 - 650	150 - 800	150 - 980
	H	20 - 150	20 - 150	20 - 150
	L	130 - 800	130 - 800	130 - 800
	W	250 - 650	250 - 800	250 - 980
	H	30 - 150	30 - 150	30 - 150
	L	140 - 800	140 - 800	140 - 800
	W	140 - 500	140 - 650	140 - 820
	H	15 - 50	15 - 50	15 - 50

All sizes in mm



Feeder

- Independently motorized friction feeder with variable speed
- Adjustable vibration motor
- Side feed gates fully adjustable to the width of the blank
- Three adjustable front feed knives




Aligner Section

- Independent section with an unparallel lower carrier that guides the box to a parallel handrail that allows a perfect blank alignment



Pre-folding Section

- Left upper left 180° pre-folding
- The third indentation line 135° pre-folding
- 1st and 3rd crease openers

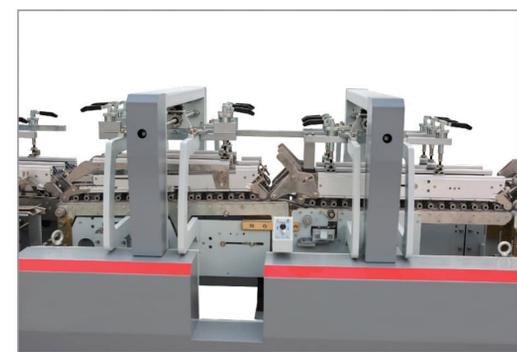

Climbing Section

- One-button electric lifting, easy to understand and operate, greatly improving production efficiency and achieving more stable folding



Output Section

- Upper and lower drive mechanism for lengthwise adjustment
- Equipped with automatic belt tension-adjusting system

	RAPIDO FG 65	RAPIDO FG 80	RAPIDO FG 98
Stock range	200 ~ 650 g/m ² Cardboard	200~ 800 g/m ² Cardboard N-E-F flute corrugated board	
Belt speed		0~400 m/min	
Inching speed		30 m/min	
Max. blank width	650 mm	800 mm	980 mm
Dimensions (L*W*H)	15.5 x 1.65 x 1.8 m	15.5 x 1.8 x 1.8 m	15.5 x 2 x 1.8 m
Machine weight	6.5 T	7.5 T	8.5 T
Power requirements		21 kw	

RAPIDO FG



RAPIDO FG HIGH SPEED VERSATILE FOLDER GLUER

High speed non stop production, fast setup, ergonomic design and easy accessibility reduce setup time. Can be equipped with a speedwave for fast crash lock, 4 and 6 corners.

	FG 110	FG 145	FG 165
	L 100 - 1000	100 - 1000	100 - 1000
	W 180 - 1100	180 - 1450	180 - 1650
	H 85 - 540	85 - 715	85 - 815
	L 100 - 1000	100 - 1000	100 - 1000
	W 200 - 1050	200 - 1400	200 - 1600
	H 90 - 515	90 - 690	90 - 790
	L 140 - 1000	140 - 1000	140 - 1000
	W 180 - 1050	180 - 1400	180 - 1600
	H 30 - 150	30 - 150	30 - 150
	L 140 - 1000	140 - 1000	140 - 1000
	W 280 - 1050	280 - 1400	280 - 1600
	H 30 - 150	30 - 150	30 - 150
	L 140 - 1000	140 - 1000	140 - 1000
	W 220 - 1000	220 - 1200	220 - 1400
	H 15 - 50	15 - 50	15 - 50

All sizes in mm

DESIGNED FOR
CORRUGATED BOARD

Belt speed **400 m/min.**
Speedwave (optional)
4 & 6 Corners (optional)



Easy Pack (optional)



Feeder

- Independently motorized friction feeder with variable speed
- Adjustable vibration motor



Aligner Section

- Independent section with an unparallel lower carrier that guides the box to a parallel handrail that allows a perfect blank alignment



Pre-folding Section

- Left upper left 180° pre-folded
- The third indentation line 135° pre-folding



Climbing Section

- One-button electric lifting, easy to understand and operate, greatly improving production efficiency and achieving more stable folding



Final Folding Section

- Smoothly and accurately finish the second fold line, the fourth fold line 180° combined
- Outer folding belts adjustable up to 180° with variable speed



Output Section

	RAPIDO FG 110	RAPIDO FG 145	RAPIDO FG 165
Stock range	200 ~ 800 g/m ² Cardboard , N-E-F flute corrugated board		
Belt speed	0~400 m/min		
Inching speed	30 m/min		
Max. blank width	110 mm	1450 mm	1650 mm
Dimensions (L*W*H)	19 x 2.05x 1.6 m	19 x 2.4 x 1.6 m	19 x 2.6 x 1.6 m
Machine weight	11 T	12 T	13 T
Power requirements	31 kw	36 kw	36 kw



TRUE NORTH GRAPHICS, INC.
truenorth-graphics.com
tngraphicsinc@gmail.com (403) 466 9798



YouTube

