


RAPIDO SH 140/170 PRO SHEETER

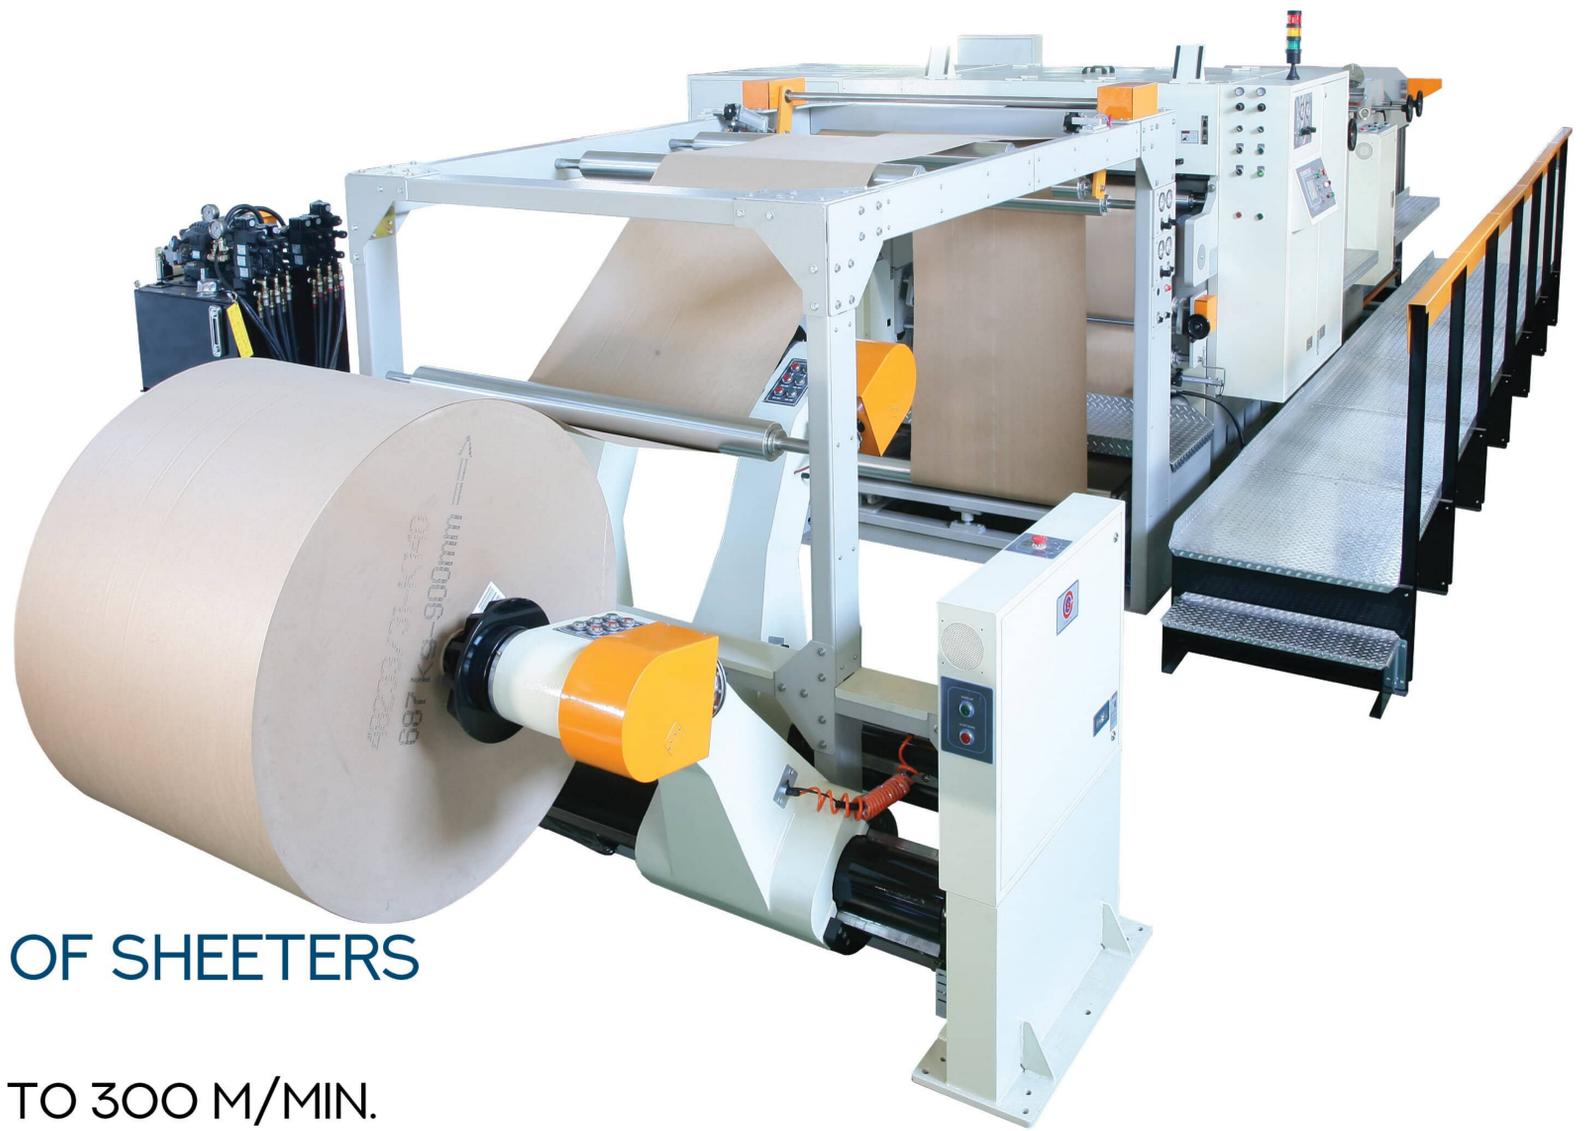

TW PRO LINE OF SHEETERS

- HIGH SPEED UP TO 300 M/MIN.
- 2 INFEED REEL STANDS
- HIGH PRODUCTION CAPACITY
- HIGH PRECISION
- OPERATOR FRIENDLY
- VERY SOLID AND ROBUST STRUCTURE

RAPIDO® SH 140/170 PRO

A PERFECT CHOICE FOR LARGE CONVERTING AND FOLDING CARTON PRODUCTION

SPECIFICATIONS	140 PRO	170 PRO
REEL WIDTH	1400 mm, 55"	1700 mm, 67"
MAXIMUM REEL DIAMETER	1800 mm, 55"	1800 mm, 55"
CUT-OFF ACCURACY	+/- 0.2 mm at cutting length less than 1000 mm +/- 0.02% over 1000 mm	+/- 0.2 mm at cutting length less than 1000 mm +/- 0.02% over 1000 mm
MAXIMUM SPEED	450 sheets/min - 300 m/min (980 ft/min)	450 sheets/min - 300 m/min (980 ft/min)
CUT-OFF LENGTH	450 - 1400 mm 18" -55"	450 - 1400 mm 18" -55"
KNIFE LOADING	1000 gsm	1000 gsm
MAXIMUM PILE WEIGHT	2500 kg	2500 kg
PILE HEIGHT	1300 mm including skid	1300 mm including skid
SUBSTRATE RANGE	120 - 650 gsm	120 - 650 gsm

RAPIDO SH 140/170 ECO SHEETER



GTM ECO LINE OF SHEETERS

- MEDIUM SPEED UP TO 200 M/MIN.
- 1 OR 2 REEL STANDS
- MEDIUM PRODUCTIVITY
- VERY SOLID AND ROBUST STRUCTURE
- A COMPACT MACHINERY FOOTPRINT

RAPIDO® SH 140/170 ECO

A PERFECT CHOICE FOR SMALL AND MEDIUM FOLDING CARTON PRODUCTION

SPECIFICATIONS	140 ECO	170 ECO
REEL WIDTH	1400 mm, 55"	1700 mm, 67"
MAXIMUM REEL DIAMETER	1800 mm, 55"	1800 mm, 55"
CUT-OFF ACCURACY	+/- 0.5mm +/- 0.02"	+/- 0.5mm +/- 0.02"
MAXIMUM SPEED	200 m/min (656 ft/min)	200 m/min (656 ft/min)
CUT-OFF LENGTH	450 - 1400 mm 18" -55"	450 - 1400 mm 18" -55"
KNIFE LOADING	550 gsm	550 gsm
MAXIMUM PILE WEIGHT	2500 kg	2500 kg
PILE HEIGHT	1300 mm including skid	1300 mm including skid
SUBSTRATE RANGE	120 - 550 gsm	120 - 550 gsm
MACHINE DIM. (L) x (H)	6.9 x 2.2 m / 22f 6" x 7f 2"	6.9 x 2.2 m / 22f 6" x 7f 2"



TRUE NORTH GRAPHICS, INC.
truenorth-graphics.com
 tngraphicsinc@gmail.com (403) 466 9798



YouTube

